

Modern and simple design style, coupled with exquisite materials and perfect assembly details, the product appearance looks rich in texture. The direct light adopts a diffusion plate with microprism structure to realize anti-glare function, and 90 degrees (direct), 110 degrees (indirect). Surface mounted installation, very simple and convenient. Typical light efficiency 100LM/W, flicker free, 90% DIRECT / 10% INDIRECT lighting. It can realize 1-10V or DALI synchronous dimming, and main materials are aluminum profiles and PMMA. Designed with square corner.

Features

Direct and Indirect lighting with impressive light uniformity

UGR<19

Support DALI and 1-10V dimming

Easy for installation and maintenance



5 years warranty

Application Areas

For open-plan office, breakout area, cafeteria, Guest room



Technical data

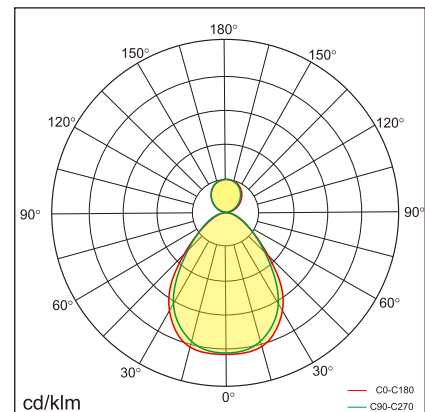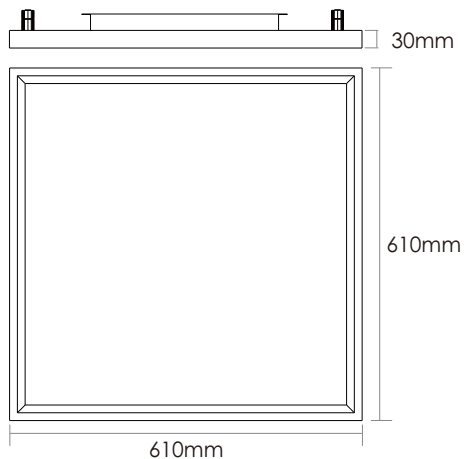

Item No.	BMSC-6106050-NN	BMSC-6106050-VN	BMSC-6106050-DN
Input Power	↑10W/50W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑1300lm/4000lm↓		
UGR	<19		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑110°/90°↓		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	5.85kg		
Package size	760*665*300mm		
20GP	632pcs		
40GP	1396pcs		