

Simply and reasonable structure design with excellent craftwork. Appearance with rich texture. Reliable heat dissipation system. 5years warranty. Typical value up to 100lm/W with flicker freely. 1-10V and Dali synchronous dimming, support CASAMBI wireless system. Profile aluminum, PMMA as main materials, Surface mounted installation. Easy & Fast.

Features

Simple but delicate design

Easy for maintenance

Light efficiency could be 100LM/W

Simple, easy and quick installation

Support for smart control functions

- DALI dimming
 - 1-10V dimming
 - tunable white
-



5 years warranty

Application Areas

For open-plan office, reception, training room, cafeteria, etc.



Technical data

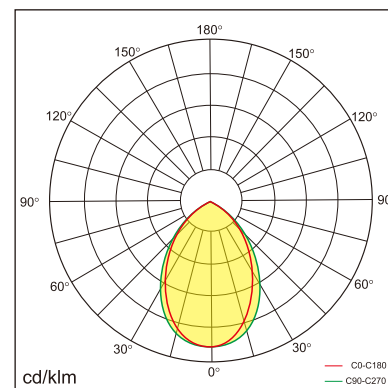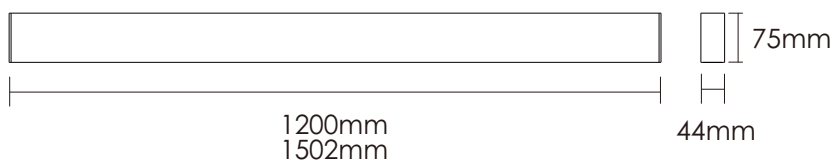

Item No.	BLIC-1204040-NN	BLIC-1204040-VN	BLIC-1204040-DN
Input Power	40W		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	3600lm		
UGR	<21		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	80°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	2.7kg		
Package size	1360*315*335mm		
20GP	1336PCS		
40GP	2952PCS		

Technical data



Item No.	BLIC-1505050-NN	BLIC-1505050-VN	BLIC-1505050-DN
Input Power	50W		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	4500lm		
UGR	<21		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	80°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Material	6063AL		
Protection Level	IP 20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	3.6kg		
Package size	1660*315*335mm		
20GP	1096PCS		
40GP	2416PCS		