

Modern and simple design style, coupled with exquisite materials and perfect assembly details, the product appearance looks rich in texture. The direct light adopts a diffusion plate with microprism structure to realize anti-glare function, and 90 degrees (direct), 110 degrees (indirect). Wall mounted installation, very simple and convenient. Typical light efficiency 90LM/W, flicker free, 50% DIRECT / 50% INDIRECT lighting. It can realize 1-10V or DALI synchronous dimming, and main materials are aluminum profiles and PMMA. Designed with Round corner

Features

Direct and indirect lighting with impressive light uniformity

Widely used in public working area with UGR<18

Easy for installation and maintenance

Support DALI and 1-10V Dimming

High lumen output with 90LM/W

SDCM < 3



5 years warranty

Application Areas

For open plan office, stairs, corridors, lobby, Break out area etc.



Technical data

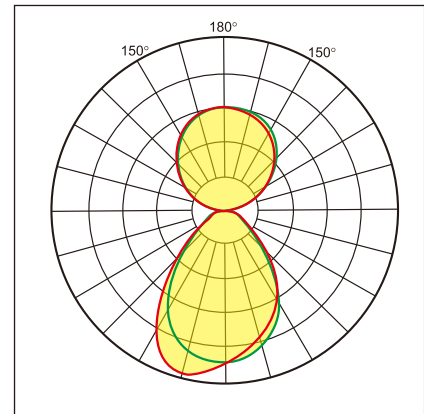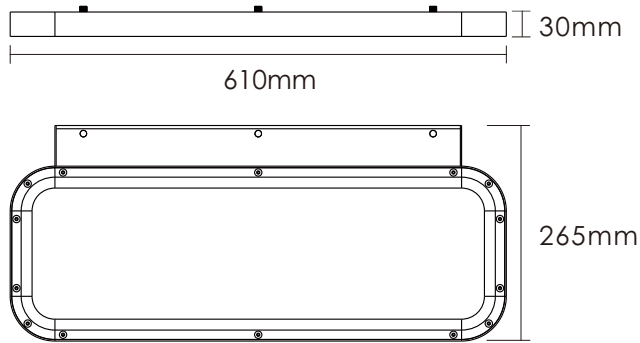

Item No.	BMRW-6104040-NN	BMRW-6104040-VN	BMRW-6104040-DN
Input Power	↑20W/20W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑1800lm/1800lm↓		
UGR	<18		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑110°/90°↓		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	3.55kg		
Package size	670*325*300mm		
20GP	1468PCS		
40GP	3244PCS		