

With extremely simple design and excellent craftwork, exquisite appearance looks with rich of texture. Collocated with micro reflector and anti-glare cover, it can realize 50°(Direct) beam angle and perfect light cutoff. UGR value is as low as 10. Main material includes aluminum profile and PC. Typical value of light efficiency is 110lm/w, and lighting is of flicker free. Lamp supports 1-10V and DALI dimming. Tunable white can be realized. Adopting surfaced mounted installation.

Features

Simple surface mounted solutions, easy for installation and maintenance

UGR<10

Support DALI and 1-10V dimming

Support tunable white



5 years warranty

Application Areas

For open-plan office, Individual office, small meeting room, reception, etc.



Technical data

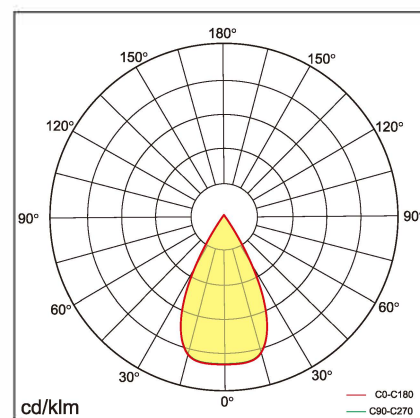

Item No.	BLEC1-1204040-NN	BLEC1-1204040-VN	BLEC1-1204040-DN
Input Power	40W		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	4500lm		
UGR	<10		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	50°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	3.6kg		
Package size	1335*220*300mm		
20GP	1088pcs		
40GP	2404pcs		