



Simple, classic design with excellent craftwork. Appearance with rich texture. Extremely saving installation and maintenance time by revolutionary surface mounted structure. We offer 350MM,450MM,600MM,900MM for choosing. We use special anti-glare cover, UGR<18,Offering comfortable and soft lights for Indirect to support luminous environment.Typical value up to 120lm/W with flicker freely. Support smart functions like Motion sensor, 1-10V and Dali dimming, Tunable white and Emergency function.Work with CASAMBI wireless system to support group setting. Simply assembling structure, flexible to support customers' requirement.Profile aluminum, SGCC, and PC as main materials. Surface mounted installation.

Features

Ultimate uniform and quality lighting effects with professional glare control, UGR <18

Come with several size Ø350, Ø450, Ø600, Ø900

Extremely simple for installation and maintenance

Direct and Indirect lighting

Support for smart control functions

- DALI dimming
- 1-10V dimming
- CASAMBI



5 years warranty

Application Areas

For open-plan office, Individual office, Cafeteria, Corridors, Break-out area, Classroom ,etc.





Technical data

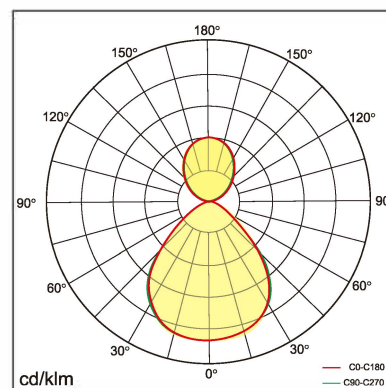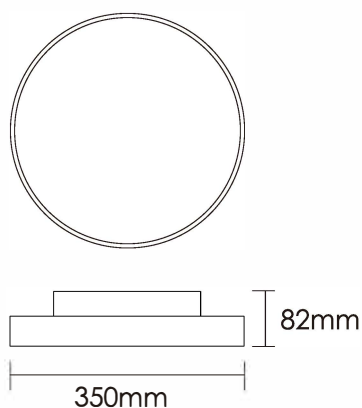



Item No.	BROC-3501812-NN		BROC-3501812-VN	BROC-3501812-DN
Input Power	↑6W/12W↓			
Input Voltage	AC200~240V			
Power Factor	≥0.9			
Luminous Flux	↑500lm/1200lm↓			
UGR	<18			
Color Rendering Index	>80			
Life Time	L80(B10)50,000H			
Beam Angle	↑100°/95°↓			
CCT	3000/4000/6000K			
Colour consistency SDCM	< 3			
Dimming	NO	1-10V dimming		DALI dimming
Sensor	NO			
Housing Color	Silver/White			
Fixture Materia	6063AL			
Protection Level	IP20			
Storage Temperature	-40°C~+80°C			
Working Temperature	-20°C~+45°C			
Net Weight	2.8kg			
Package size	510*450*155mm			
20GP	675PCS			
40GP	1490PCS			

Technical data

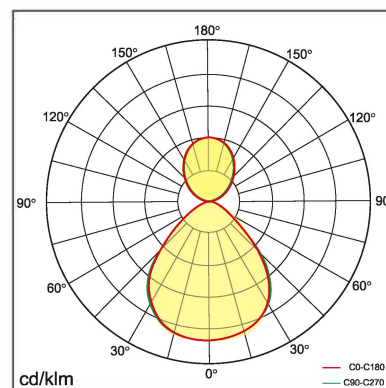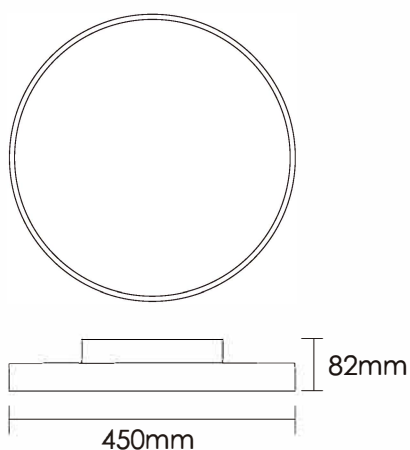



Item No.	BROC-4503021-NN	BROC-4503021-VN	BROC-4503021-DN
Input Power	↑9W/12W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑1100lm/2200lm↓		
UGR	<18		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑100°/95°↓		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	3.7kg		
Package size	530*530*155mm		
20GP	550PCS		
40GP	1215PCS		

Technical data

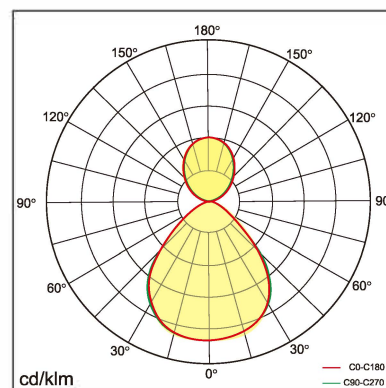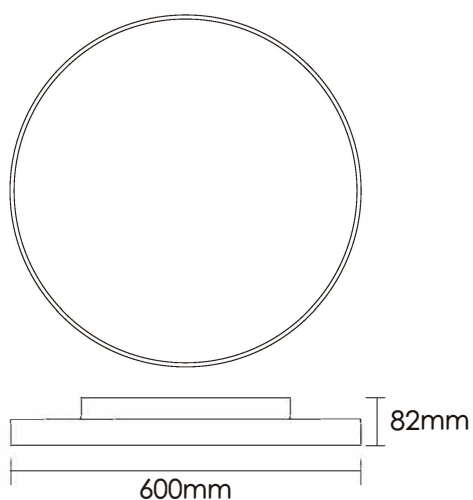

Item No.	BROC-6004834-NN		BROC-6004834-VN	BROC-6004834-DN
Input Power	↑14W/34W↓			
Input Voltage	AC200~240V			
Power Factor	≥0.9			
Luminous Flux	↑1960lm/3800lm↓			
UGR	<17			
Color Rendering Index	>80			
Life Time	L80(B10)50,000H			
Beam Angle	↑100°/95°↓			
CCT	3000/4000/6000K			
Colour consistency SDCM	< 3			
Dimming	NO	1-10V dimming		DALI dimming
Sensor	NO			
Housing Color	Silver/White			
Fixture Materia	6063AL			
Protection Level	IP20			
Storage Temperature	-40°C~+80°C			
Working Temperature	-20°C~+45°C			
Net Weight	6kg			
Package size	700*700*155mm			
20GP	315PCS			
40GP	697PCS			

Technical data

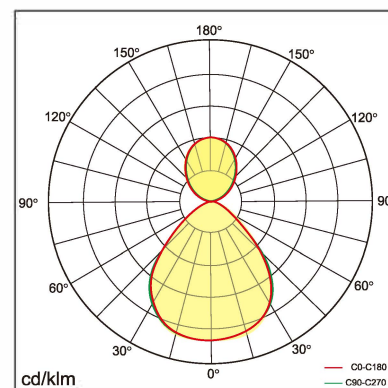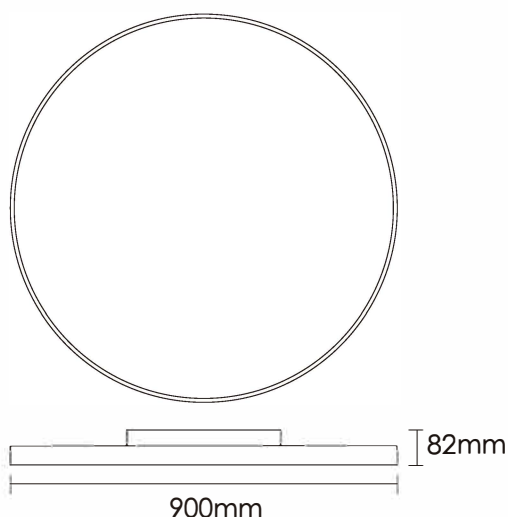

Item No.	BROC-9008056-NN		BROC-9008056-VN	BROC-9008056-DN
Input Power			↑24W/56W↓	
Input Voltage			AC200~240V	
Power Factor			≥0.9	
Luminous Flux			↑3400lm/6200lm↓	
UGR			<15	
Color Rendering Index			>80	
Life Time			L80(B10)50,000H	
Beam Angle			↑100°/95°↓	
CCT			3000/4000/6000K	
Colour consistency SDCM			< 3	
Dimming	NO		1-10V dimming	DALI dimming
Sensor			NO	
Housing Color			Silver/White	
Fixture Materia			6063AL	
Protection Level			IP20	
Storage Temperature			-40°C~+80°C	
Working Temperature			-20°C~+45°C	
Net Weight			11.3kg	
Package size			1020*1020*155mm	
20GP			148PCS	
40GP			328PCS	