

Simple, classic design with excellent craftwork. Appearance with rich texture. Extremely saving installation and maintenance time by revolutionary surface mounted structure. We offer  $\phi 450\text{mm}$ ,  $\phi 600\text{mm}$  for choosing. We use special anti-glare cover, Offering comfortable and soft lights for Indirect to support luminous environment. Typical value up to  $135\text{lm/W}$  with flicker freely. Support smart functions like Motion sensor, 1-10V and Dali dimming, Tunable white and Emergency function. Work with CASAMBI wireless system to support group setting. Simply assembling structure, flexible to support customers' requirement. Profile aluminum, SGCC, and PC as main materials.

## Features

Simple and exquisite industrial design with rich texture

Come with several size  $\phi 450\text{mm}$ ,  $\phi 600\text{mm}$

Extremely simple for installation and maintenance

Light efficiency up to  $135\text{lm/W}$


Support smart control functions

- 1-10v dimming
- DALI dimming
- CASAMBI



5 years warranty

## Application Areas

Open-plan office, individual office, Cafeteria, Corridors, Break-out area, Classroom, etc.



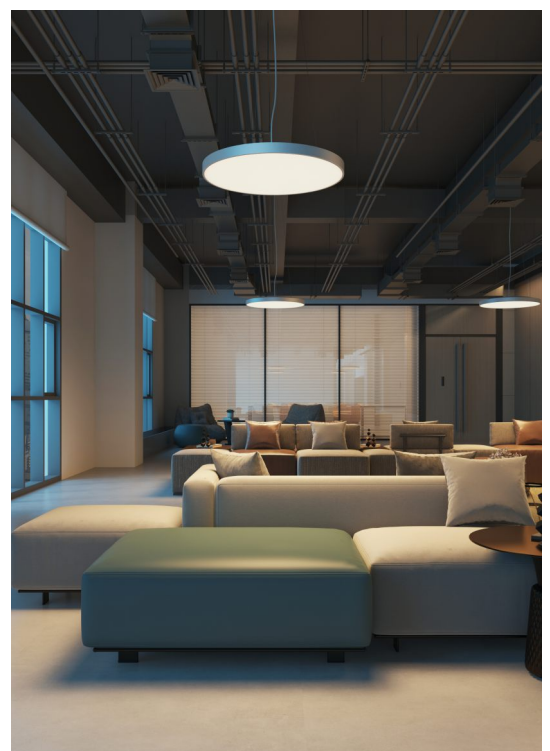


# Technical data

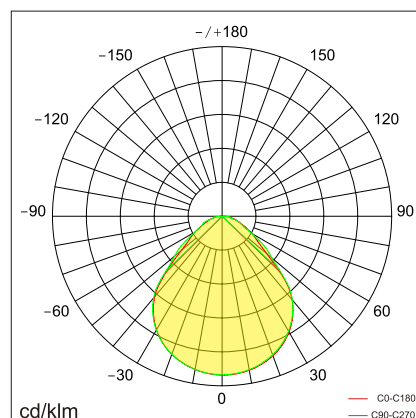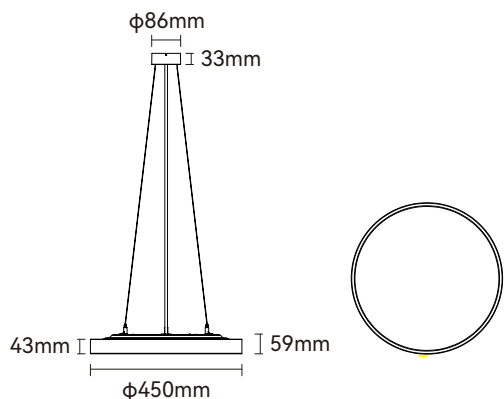

| Item No.                | BEZP-4503030-NN    | BEZP-4503030-VN | BEZP-4503030-DN |
|-------------------------|--------------------|-----------------|-----------------|
| Input Power(±10%)       | 30W ↓              |                 |                 |
| Input Voltage           | AC200~240V         |                 |                 |
| Power Factor            | ≥0.9               |                 |                 |
| Luminous Flux(±10%)     | 3050lm ↓           |                 |                 |
| UGR                     | <21                |                 |                 |
| Color Rendering Index   | >80                |                 |                 |
| Life Time               | L80(B10)50,000H    |                 |                 |
| Beam Angle              | 90° ↓              |                 |                 |
| CCT(±200K)              | 3000/4000/6000K    |                 |                 |
| Colour consistency SDCM | <3                 |                 |                 |
| Dimming                 | NO                 | 1-10V dimming   | Dali dimming    |
| Sensor                  | NO                 |                 |                 |
| Housing Color           | Silver/White/Black |                 |                 |
| Fixture Materia         | 6063AL             |                 |                 |
| Protection Level        | IP20               |                 |                 |
| Storage Temperature     | -40°C~+80°C        |                 |                 |
| Working Temperature     | -20°C~+45°C        |                 |                 |
| Net Weight              | 2.9kg              |                 |                 |
| Package size            | 537*537*122mm      |                 |                 |
| 20GP                    | 800pcs             |                 |                 |
| 40GP                    | 1672pcs            |                 |                 |

# Technical data

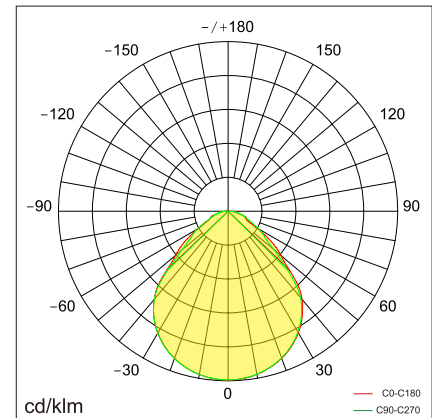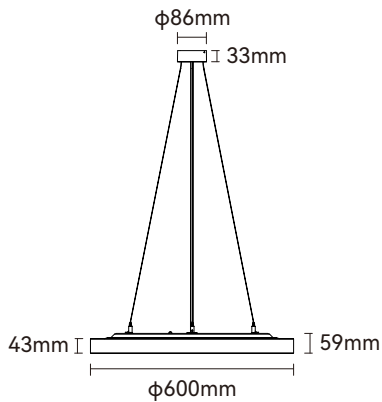

| Item No.                | BEZP-6004040-NN    |               | BEZP-6004040-VN | BEZP-6004040-DN |
|-------------------------|--------------------|---------------|-----------------|-----------------|
| Input Power(±10%)       | 40W ↓              |               |                 |                 |
| Input Voltage           | AC200~240V         |               |                 |                 |
| Power Factor            | ≥0.9               |               |                 |                 |
| Luminous Flux(±10%)     | 5411lm ↓           |               |                 |                 |
| UGR                     | <21                |               |                 |                 |
| Color Rendering Index   | >80                |               |                 |                 |
| Life Time               | L80(B10)50,000H    |               |                 |                 |
| Beam Angle              | 90° ↓              |               |                 |                 |
| CCT(±200K)              | 3000/4000/6000K    |               |                 |                 |
| Colour consistency SDCM | <3                 |               |                 |                 |
| Dimming                 | NO                 | 1-10V dimming |                 | Dali dimming    |
| Sensor                  | NO                 |               |                 |                 |
| Housing Color           | Silver/White/Black |               |                 |                 |
| Fixture Materia         | 6063AL             |               |                 |                 |
| Protection Level        | IP 20              |               |                 |                 |
| Storage Temperature     | -40℃~+80℃          |               |                 |                 |
| Working Temperature     | -20℃~+45℃          |               |                 |                 |
| Net Weight              | 4.7kg              |               |                 |                 |
| Package size            | 687*687*122mm      |               |                 |                 |
| 20GP                    | 456pcs             |               |                 |                 |
| 40GP                    | 969pcs             |               |                 |                 |