

With extremely simple design and excellent craftwork, exquisite appearance looks with rich of texture. Lamp is designed with special Direct/Indirect lighting and 115°(Indirect) beam angle. Collocated with micro reflector and anti-glare cover, it can realize 60°(Direct) beam angle and perfect light cutoff. UGR value is as low as 6. Adopting linkable structure design, there is no light leak gap. Main material includes aluminum profile and PC. Typical value of light efficiency is 148lm/w, and lighting is of flicker free. Lamp supports 1-10V and DALI dimming. Adopting suspended installation.

Features

Simple and rich textured design

Light efficiency up to 148lm/W

UGR<6

Support DALI and 1-10V dimming

Linkable design provide a clean, simple link

Direct and Indirect lighting



5 years warranty

Application Areas

Open-plan office, Individual office, small meeting room, reception, etc.



Technical data

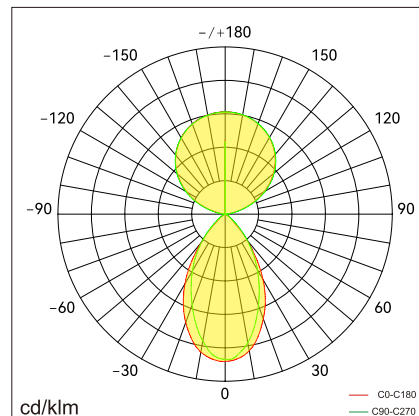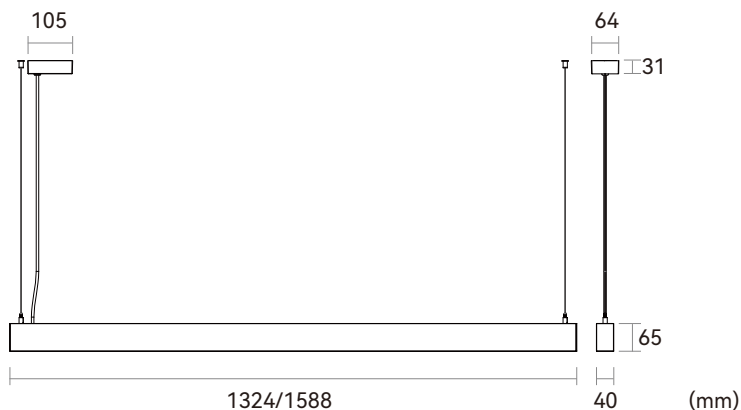

Item No.	BROP0-1206024-NN	BROP0-1206024-VN	BROP0-1206024-DN
Input Power(±10%)	↑ 36W/24W ↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux(±10%)	↑ 6010lm/2900lm ↓		
UGR	<6		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑ 115°/60° ↓		
CCT(±200K)	3000/4000/6000K		
Colour consistency SDCM	<3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver / White / Black		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	2.9kg		
Package size	1468*131*98mm(1pcs)		
20GP	1672pcs		
40GP	3373pcs		

Technical data



Item No.	BROP0-1507028-NN	BROP0-1507028-VN	BROP0-1507028-DN
Input Power(±10%)	↑ 42W/28W ↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux(±10%)	↑ 7000lm/3400lm ↓		
UGR	<6		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑ 115°/60° ↓		
CCT(±200K)	3000/4000/6000K		
Colour consistency SDCM	<3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver / White / Black		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	3.3kg		
Package size	1732*131*98mm(1pcs)		
20GP	1396pcs		
40GP	2838pcs		