

With extremely simple design and excellent craftwork, exquisite appearance looks with rich of texture. Collocated with micro reflector and anti-glare cover, it can realize 35° /65° beam angle and perfect light cutoff. UGR value is as low as 15. Adopting structure of trimless design, independent led modules and push-in & push-out structure, lamp is easy for installation and maintenance. Main material includes aluminum profile and PC. Typical value of light efficiency is 110lm/w, and lighting is of flicker free. Lamp supports 1-10V and DALI dimming. Collocated with CASAMBI wireless system, dimming and tunable white can be realized.

Features

Push-in-Push-out Structure, easy for installation and maintenance

Perfect glare control, Low UGR




Support DALI and 1-10V dimming

5 years warranty



Application Areas

For office corridor, washroom, staircase, etc.

Technical data

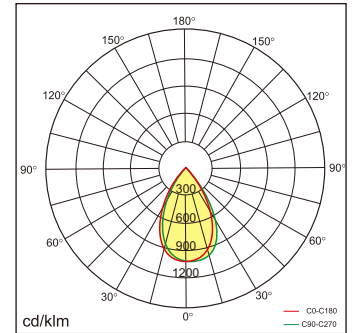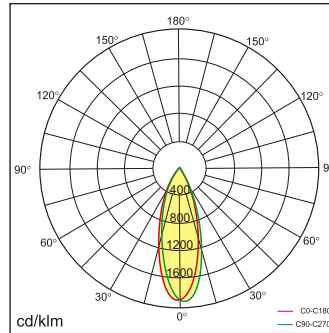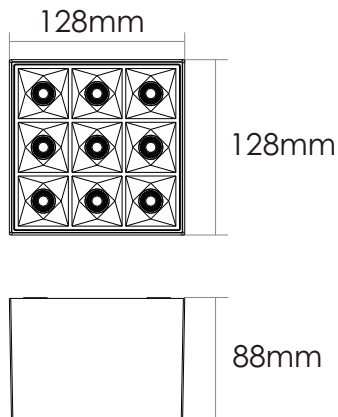

Item No.	BEFK-1200808-NN		BEFK-1200808-VN	BEFK-1200808-DN
Input Power	8W			
Input Voltage	AC200~240V			
Power Factor	≥0.9			
Luminous Flux	850lm			
UGR	<14(35°) / <17(65°)			
Color Rendering Index	>80			
Life Time	L80(B10)50,000H			
Beam Angle	35°/65°			
CCT	3000/4000/6000K			
Colour consistency SDCM	< 3			
Dimming	NO		1-10V dimming	DALI dimming
Sensor	NO			
Housing Color	Silver/White			
Fixture Materia	6063AL			
Protection Level	IP20			
Storage Temperature	-40°C~+80°C			
Working Temperature	-20°C~+45°C			
Net Weight	0.8kg			
Package size	960*395*245mm			
20GP	5160pcs			
40GP	11400pcs			

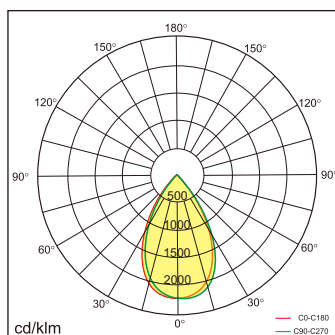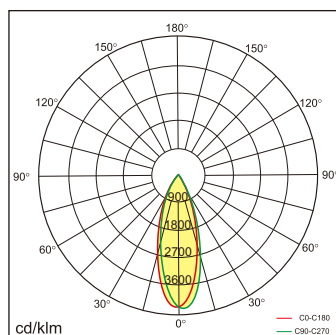

Item No.	BEFK-1201818-NN	BEFK-1201818-VN	BEFK-1201818-DN
Input Power	18W		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	1900lm		
UGR	<17(35°) / <19(65°)		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	35°/65°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40℃~-80℃		
Working Temperature	-20℃~+45℃		
Net Weight	0.8kg		
Package size	960*395*245mm		
20GP	5160pcs		
40GP	11400pcs		